
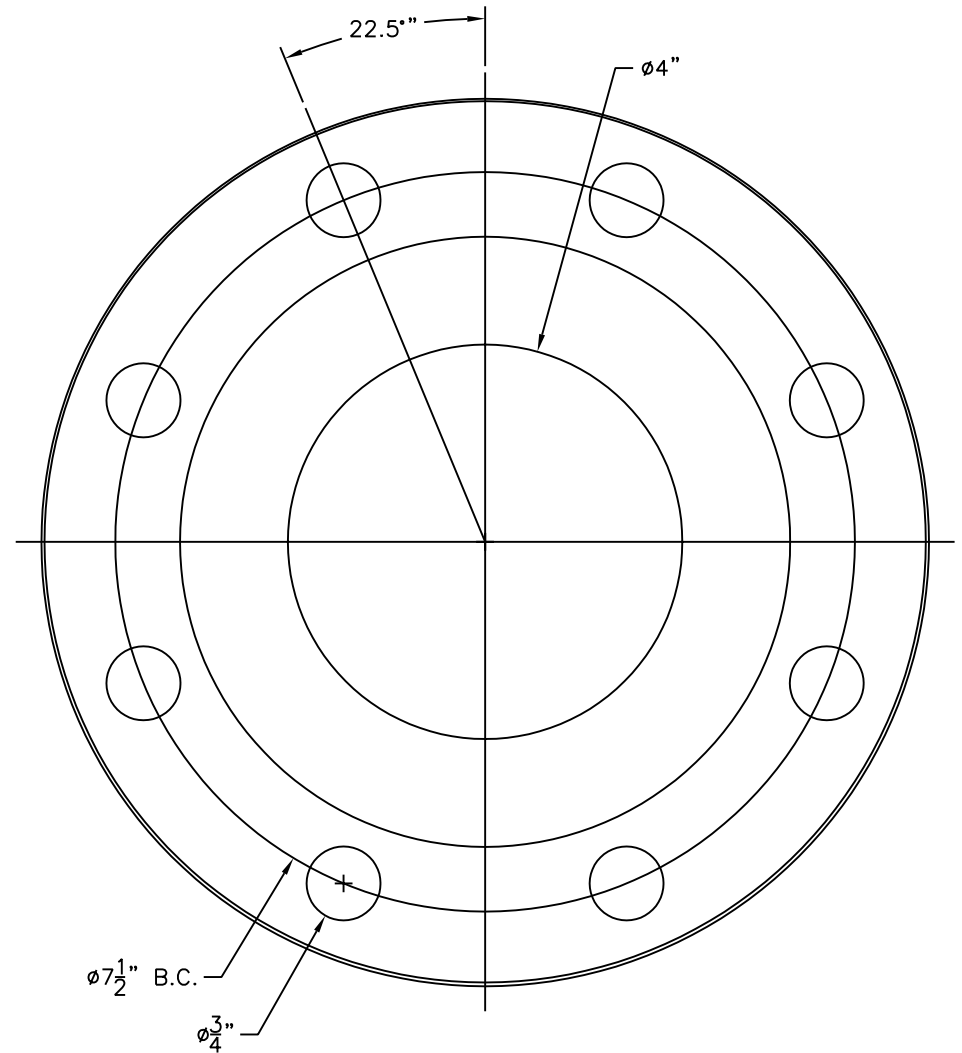


MODEL 4" LIG

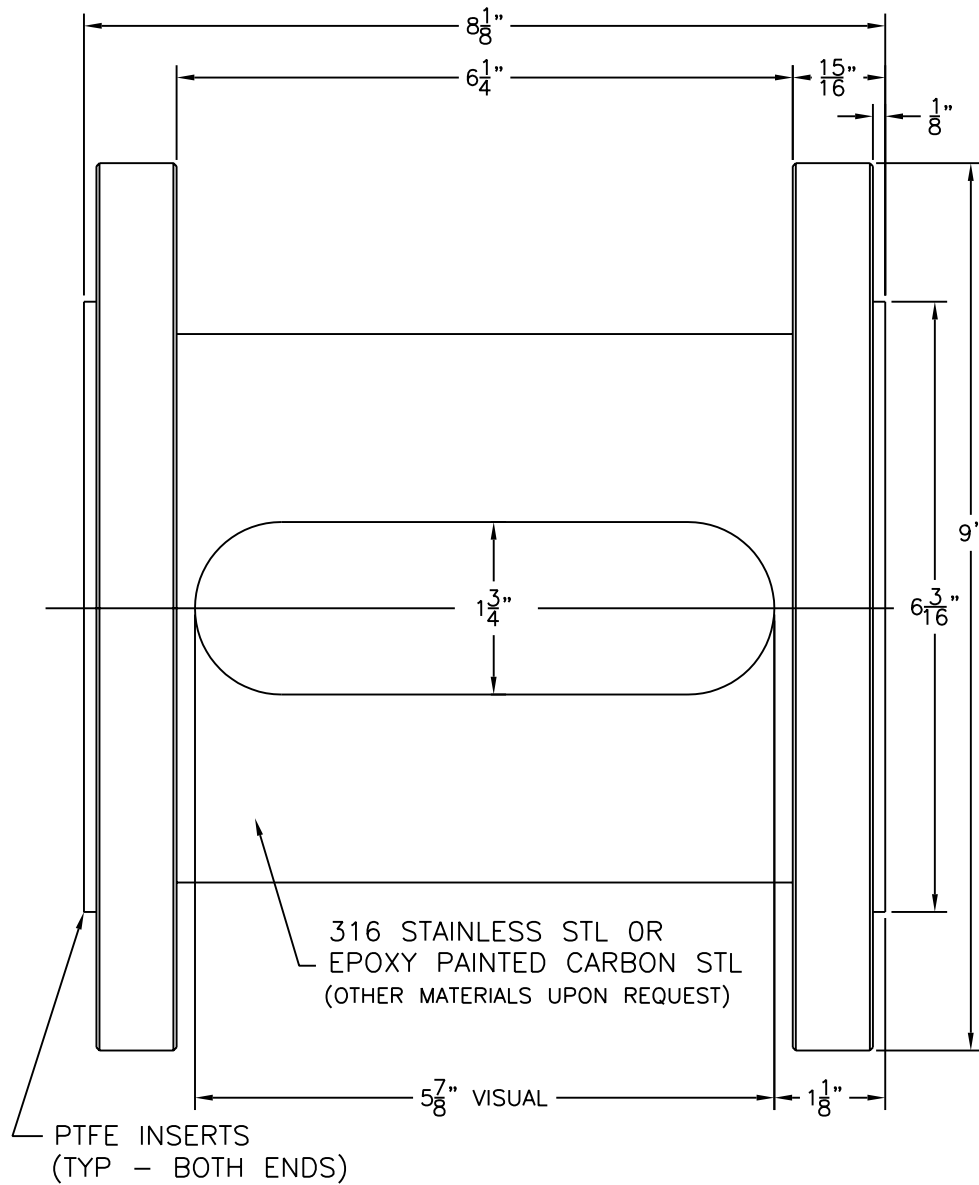

O-RING SEALS [NOT SHOWN]
STANDARD: BUNA-N, EPDM,
FLUROELASTOMER [FKM]

ADD'L: FEP ENCAPSULATED SILICONE & AFLAS
FOR KALREZ - CALL FACTORY

UNLESS OTHERWISE NOTED: DIMENSIONS ARE IN INCHES DIMENSIONS SYMMETRICAL ABOUT CENTERLINES. BREAK CORNERS. REMOVE BURRS. CASTING FILLET RADI: 1/8". CAST CORNER RADI: 1/16".		MACHINING TOLERANCES: FRACTIONS + 1/64 DECIMALS ± .010 ANGLES ± 1/2° FILLET RADI: 1/32 R. MACHINED FINISH, Ra: 125u IN. Ø.1, .0, 0 WITHIN 1/64 FIN		THIS DRAWING IS THE SOLE PROPERTY OF THE J.G. PAPAILIAS COMPANY, INC. AND NEITHER THE DOCUMENT NOR THE INFOR- MATION CONTAINED HEREIN SHALL BE COPIED, REPRODUCED, DISCLOSED OR TRANSFERRED, EXCEPT AS AUTHORIZED IN WRITING.	
DRAWN	RPS	04/07/05	SIZE	CAGE CODE	DRAWING NO.
CHECKED			B	12740	4LIGGA
APPROVED			SCALE: 1 : 1	WT:	SHEET 1 OF 1

PAPAILIAS

245 PEGASUS AVENUE, NORTHVALE, NJ 07647

4" LIG
ARMORED SIGHTFLOW
INDICATOR